

# RTM SM911

## RTM SM911 +6

Specially designed for compatibility  
with industry standard

STANDARD BIAS COMPATIBLE · STUDIO AND ARCHIVE TAPE

BACKCOATED

FORMATS: 1/4", 1/2", 1", 2"

MULTITRACK


MASTERING RECORDING

HIGH LEVEL UNIFORMITY UP TO THE HIGHEST FREQUENCIES

EXCELLENT DC NOISE

EXCELLENT WINDING EVEN AT HIGH SPEEDS

LOW PRINT-THROUGH



## Technical Data




### 1. Recording Performance Specifications

(depending on bias settings)

| Tape speed                | 76.2 cm/s          |
|---------------------------|--------------------|
|                           | 30 ips             |
| Recording head gap length | 7.0 $\mu\text{m}$  |
| Playback head gap length  | 3.0 $\mu\text{m}$  |
| Equalisation              | 17.5 $\mu\text{s}$ |
| Reference level           | 320 nWb/m          |

| Tape speed                | 38.1 cm/s             |
|---------------------------|-----------------------|
|                           | 15 ips                |
| Recording head gap length | 7.0 $\mu\text{m}$     |
| Playback head gap length  | 3.0 $\mu\text{m}$     |
| Equalisation              | 50+3180 $\mu\text{s}$ |
| Reference level           | 320 nWb/m             |

| Tape speed                | 19.05 cm/s            |
|---------------------------|-----------------------|
|                           | 7,5 ips               |
| Recording head gap length | 7.0 $\mu\text{m}$     |
| Playback head gap length  | 3.0 $\mu\text{m}$     |
| Equalisation              | 50+3180 $\mu\text{s}$ |
| Reference level           | 320 nWb/m             |

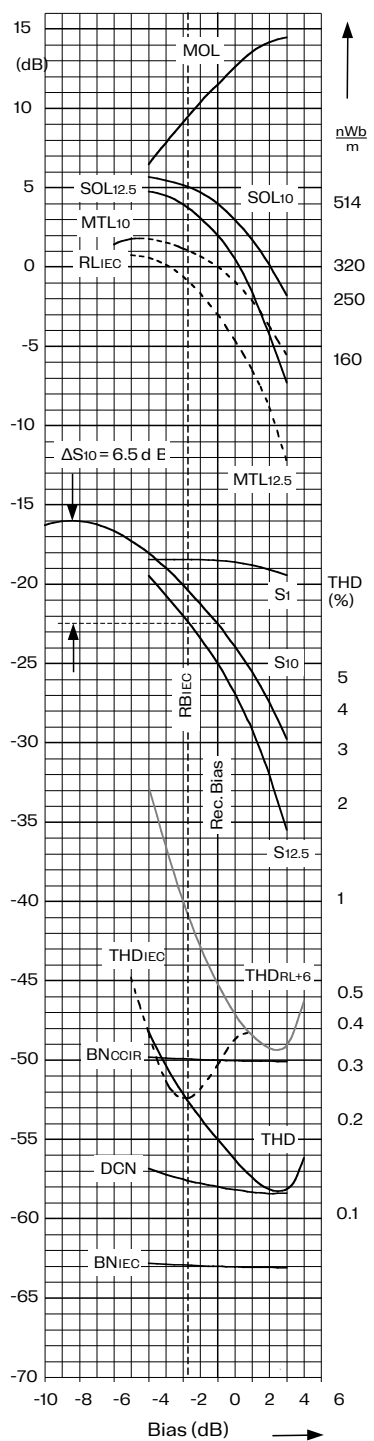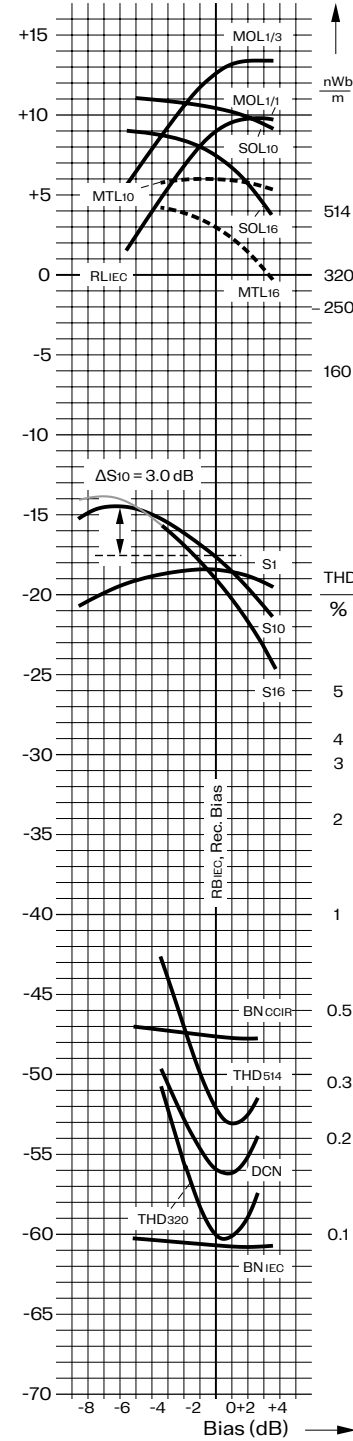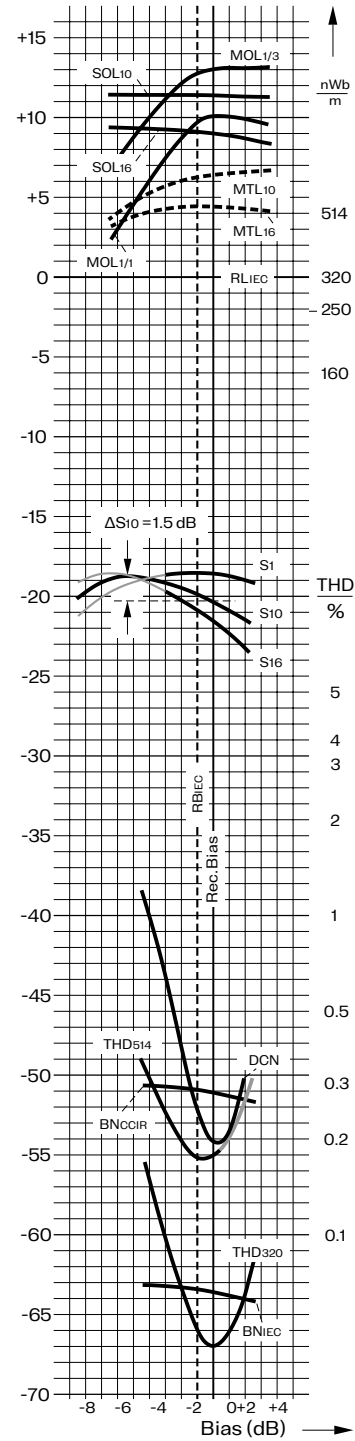

## Technical Data

### 2. Measurement Conditions

| Tape speed            |   | <b>76.2 cm/s</b>     | <b>38.1 cm/s</b>     | <b>19.05 cm/s</b>    | <b>Ref.</b> |
|-----------------------|---|----------------------|----------------------|----------------------|-------------|
|                       |   | <b>30 ips</b>        | <b>15 ips</b>        | <b>7.5 ips</b>       |             |
| Record head:          |   | Studer               | Studer               | Studer               | <b>1.1</b>  |
| Gap length            |   | 7.0 µm<br>(0.25 mil) | 7.0 µm<br>(0.25 mil) | 7.0 µm<br>(0.25 mil) |             |
| Track width           |   | 6.3 mm<br>(1/4")     | 6.3 mm<br>(1/4")     | 6.3 mm<br>(1/4")     |             |
| Playback head:        |   | Studer               | Studer               | Studer               | <b>1.1</b>  |
| Gap length            |   | 3.0 µm<br>(0.12 mil) | 3.0 µm<br>(0.12 mil) | 3.0 µm<br>(0.12 mil) |             |
| Track width           |   | 2.575 mm             | 2.575 mm             | 2.575 mm             |             |
| Playback equalisation |   | 17.5 µs<br>(NAB)     | 50+3180 µs<br>(NAB)  | 50+3180 µs<br>(NAB)  | <b>1.2</b>  |
| RLIEC IEC             | Reference Level at 1kHz                       | 320 nWb/m            | 320 nWb/m            | 320 nWb/m            | <b>1.3</b>  |
|                       | IEC reference tape:batch                      | MT 82472             | MT 82472             | A 342 D              |             |
|                       | IEC reference tape bias definition            | Min.THD320           | Min.THD320           | Min.THD320           | <b>1.4</b>  |
| RBIEC                 | IEC reference bias                            | -1.0 dB              | 0,0 dB               | -1.5 dB              | <b>1.5</b>  |
| Rec.Bias              | Recommended bias setting                      | 0.0 dB               | 0.0 dB               | 0.0 dB               |             |
| ΔS10                  | Sensitivity drop for recommended bias setting | 1.5 dB               | 3.0 dB               | 6.5 dB               | <b>1.6</b>  |

### 3. Recording Performance Specifications

The table below presents the main parameters in the recommended bias setting.  
All figures given represent nominal values.

|                        |   |          |          |          |            |
|------------------------|---|----------|----------|----------|------------|
| MOL <sub>1/3</sub>     | Maximum Output Level at 1 kHz, THD = 3%   | 13.0 dB  | 12.5 dB  | 10.0 dB  |            |
| MOL <sub>1/3</sub>     | Maximum Output Level at 1 kHz, THD = 1%   | 10.0 dB  | 9.0 dB   | 6.0 dB   |            |
| SOL <sub>10</sub>      | Saturation Output Level at 10 kHz         | 11.5 dB  | 10.5 dB  | 0.5 dB   |            |
| SOL <sub>12.5</sub>    | Saturation Output Level at 12.5 kHz       |          |          | -3.5 dB  |            |
| SOL <sub>16</sub>      | Saturation Output Level at 16 kHz         | 9.0 dB   | 7.5 dB   |          |            |
| MTL <sub>10</sub>      | Maximum Twin tone Level at 10 kHz         | 6.5 dB   | 6.0 dB   | -4.5 dB  | <b>2.1</b> |
| MTL <sub>16</sub>      | Maximum Twin tone Level at 16 kHz         | 4.5 dB   | 3.0 dB   | -12.0 dB | <b>2.1</b> |
| S <sub>1</sub>         | Relative tape Sensitivity at 1 kHz        | 1.5 dB   | 1.5 dB   | 1.0 dB   | <b>2.2</b> |
| S <sub>10</sub>        | Relative tape Sensitivity at 10 kHz       | 1.5 dB   | 2.5 dB   | 0.5 dB   | <b>2.2</b> |
| S <sub>12.5</sub>      | Relative tape Sensitivity at 12.5 kHz     |          |          | 0.5 dB   | <b>2.2</b> |
| S <sub>16</sub>        | Relative tape Sensitivity at 16 kHz       | 1.5 dB   | 3.0 dB   |          | <b>2.2</b> |
| THD                    | Third Harmonic Distortion ratio at RLIEC  | -67.0 dB | -60.0 dB | -51.0 dB | <b>2.1</b> |
|                        | Third Harmonic Distortion factor at RLIEC | 0.04 %   | 0.10 %   | 0.28 %   | <b>2.1</b> |
| THDRL <sub>+10dB</sub> | Third Harm. Dist. ratio at RLIEC+4dB      | -55.0 dB | -52.0 dB | -44.5 dB | <b>2.1</b> |
|                        | Third Harm. Dist. factor at RLIEC+4dB     | 0.17 %   | 0.25 %   | 0.59 %   | <b>2.1</b> |
| DCN                    | DC noise, weighted, rel. to RLIEC         | -54.0 dB | -56.0 dB | -56.0 dB |            |
| BNIEC                  | Bias Noise level (IEC 94 ; A-weighted)    | -63.5 dB | -60.5 dB | -62.5 dB | <b>2.3</b> |
| BNCCIR                 | Bias Noise level (CCIR 468/3-weighted)    | -51.0 dB | -47.5 dB | -49.5 dB | <b>2.3</b> |
| MOL/BNIEC              | Dynamic range                             | 76.5 dB  | 73.0 dB  | 72.5 dB  | <b>2.4</b> |
| MOL/BNCCIR             | Dynamic range                             | 64.0 dB  | 60.0 dB  | 59.5 dB  | <b>2.4</b> |
| P                      | Print-through (print-effect)              | 58.0 dB  | 56.0 dB  | 57.0 dB  | <b>2.5</b> |







## Technical Data

### 4. Magnetic Properties

|     |                 |              |           | Ref        |
|-----|-----------------|--------------|-----------|------------|
| HC  | Coercivity      | 25.5 kA/m    | 320 Oe    | <b>3.1</b> |
| BRS | Retentivity     | 145 mT       | 1450 G    | <b>3.2</b> |
| ∅   | Saturation flux | 2320 nWb/m   | 232 mM/mm | <b>3.3</b> |
|     | Orientation     | longitudinal |           |            |

### 5. Physical Properties

|  |                         |                 |            |
|--|-------------------------|-----------------|------------|
| Base material  | Polyester               |                 | <b>Ref</b> |
| Tape widths available                                  | 6.3 /12.7/25.4 /50.8 mm | ¼, ½, 1, 2 inch | <b>4.1</b> |
| Tolerances of tape width                               | +0.0 /-0.06 mm          | +0.0 /-2.4 mil  | <b>4.1</b> |
| Base thickness   | 30.0 µm                 | 1.18 mil        | <b>4.2</b> |
| Coating thickness                                      | 16.0 µm                 | 0.63 mil        | <b>4.2</b> |
| Total thickness  | 50.0 µm                 | 1.97 mil        | <b>4.2</b> |
| Backcoating  | black                   |                 |            |
| Surface resistance of the magnetic coating             | <10,000 MΩ              | <10 GΩ          |            |
| Surface resistance of the back coating                 | <100 kΩ                 |                 |            |
| Load for elongation of 3 % (F3) per 6.3 mm (1/4") tape | ≥ 20 N                  | ≥ 61 MPa        | <b>4.3</b> |
| Breaking tensile strength per 6.3 mm (1/4") tape       | ≥ 30 N                  | ≥ 91 MPa        | <b>4.3</b> |



Level versus Third Harmonic Distortion Factor at frequency 1 kHz for tape speeds 30 ips (76.2 cm/s), 15 ips (38.1 cm/s) and 7 ½ ips (19.05 cm/s). See also Reference 2.1.

Input Level versus Output Level at the given frequencies 1 kHz, 10 kHz, and 16 kHz (resp. 12.5 kHz for 7 ½ ips) for tape speeds 30 ips (76.2 cm/s), 15 ips

# Technical Data

## References

The data in this publication are based on test methods described in IEC Publication 94. References are given only in the case of deviations or particularities.

**1.1** For the measurements magnetic heads are used whose properties are very similar to the standard reference heads specified in IEC Publication 94-5. Record heads with a gap length of 7  $\mu\text{m}$  (0.25 mil) and playback heads with a gap length of 3  $\mu\text{m}$  (0.12 mil) are required.

**1.2** Playback equalisation on the tape testing equipment is adjusted to provide a flat frequency response of the output voltage when playing back the frequency response section of the relevant calibration tape for the selected tape speed and equalisation.

**1.3** RLIEC (IEC reference level): The reference level is obtained when playing back the reference level section of the relevant IEC calibration tape for the selected tape speed. The reference level corresponds to a magnetic flux in the tape per metre trackwidth of 320 nWb/m.

**1.4** IEC reference tape bias definition: Using the relevant IEC reference tape and heads according to Ref. 1.1, the bias current providing the minimum third harmonic distortion ratio for a 1 kHz signal recorded at the reference level is the reference bias setting.

**1.5** RBIEC (IEC reference bias): These data represent the ratio of the bias for the relevant IEC reference tape (see Ref. 1.4) to the recommended bias for the tape under test (see Ref. 1.6).

**1.6**  $\Delta\text{S10}$  (Sensitivity drop for recommended bias setting): Operationally, the recommended bias is set while recording an input signal of 10 kHz at -20 dB. Based on the peak of the sensitivity curve S10, the bias is increased until the playback level is reduced by the given value  $\Delta\text{S10}$ .

**2.1** MTL and THD (Maximum Twin tone Level and Third Harmonic Distortion): For MTL measurement the frequency distance of the primary tones is 40 Hz. During the THD measurement the playback output is held both at IEC reference level (see Ref. 1.3), and at the increased output level RL+...dB. From the corresponding curves the distortion factor can be obtained directly as a percentage of the output level. (The dBscale can only be used for RLIEC as the output level. In order to derive the distortion ratio in dB for increased output levels at RL+...dB, this output level has to be subtracted from the value read in dB. These resulting values in dB are given in the table).

**2.2** S (Sensitivity): All the sensitivity curves are measured using a constant record current, which is necessary to obtain an output level of approximately - 20 dB for a 1 kHz input signal. A record equalisation is not used. The distances between the sensitivity curves thus reflect the record equalisation necessary to achieve a flat frequency response. The values given in the table repre-

sent the sensitivity of the tape under test at the recommended bias. As relative sensitivity values they refer to the corresponding values of the relevant IEC reference tape at its own reference bias corresponding to the definition in Ref. 1.4.

**2.3** BN (Bias Noise level): The index ...IEC refers to measurement using the weighting A-filter specified in IEC Publication 651, while ...CCIR refers to the use of the weighting filter and quasi peak meter specified in CCIR 468-3.

**2.4** MOL/BN (Dynamic range): The signal to bias noise level ratio MOL/BN results from the difference of the maximum output level MOL and the bias noise level BN. Regarding the index IEC or CCIR respectively see Ref. 2.3.

**2.5** P (Print-through): Print-through is the ratio of a reference level recording to the highest signal level transferred to the next tape layer after 24 hours storage at 20°C (68°F).

**3** The magnetic measurements are made by means of a magnetic field having a strength of 100 kA/m (1,250 Oe) in order to obtain a practically saturated magnetisation in the magnetic material of the sample.

**3.1** HC (Coercivity): The coercitive magnetic field strength is required to reduce the longitudinal magnetisation in the magnetic material to zero after the sample has been magnetised to saturation.

**3.2** BRS (Retentivity): Retentivity is the remaining magnetic flux density in the magnetic material when the magnetising field is reduced to zero after the sample has been magnetised to saturation.

**3.3**  $\emptyset\text{RS}$  (Remanent, or residual saturation flux): the so-called "residual saturation flux" is the retentivity multiplied by the thickness of the magnetic coating.


**4.1** Tape width and its tolerances correspond to the specifications given in IEC Publication 94-4.

**4.2** Thicknesses: Values given are mean averages.

**4.3** Yield strength (F3) and breaking tensile strength: According to the methods specified in IEC publication 94-4 the force necessary to produce 3% elongation, or to break the tape using a test sample length of 200 mm and an elongation rate of 100 mm/min. The value given in MPa results from the measured strength related to the cross section of the tape sample. The strengths increase a little less than proportionally with tape width.

**All data given in the specification are subject to change without prior notice due to technical progress.**

# RTM SM911



53 rue Division Leclerc  
50300 Avranches  
[www.recordingthemasters.com](http://www.recordingthemasters.com)